


Fully Automatic Paper Folder



Fully-automatic and programmable desktop folding machine, up to DIN A3. High performance and quiet operation. Our tried-and-tested, fully-automatic folding machine, equally suited to high volumes and special paper formats.



The PF-460 has memory for 36 fold types, which can be programmed and automatically accessed. The professional machine's simple operation means it can be used everywhere: in printing houses, copy shops, administrative bodies or societies.

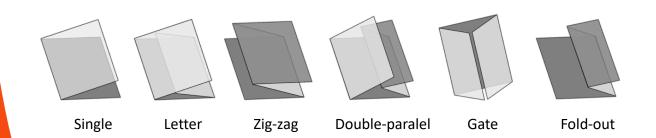



Featuring A3 size paper folding, high speed paper folding up to 14,400 sheets per hour, extreme quiet operation, accurate paper folding, diagnostic display for visual observation, simple to read displays. Fully automatic with up to 36 custom set-ups plus 9 set-ups memory functions.



Call up 6 fold types easily with the touch of a button.



Paper Feed Pressure ans seoarator adjustment help to avoid Double Feeed of thin papers and Slip and Damage of thick papers.



Perforating / Scoring unit



It makes neat stacking by carriage belts.

Paper Size	Max. 300mm x 432mm Min. 91mm x 128mm (Single fold only)
Paper Weight	46 gsm to 160 gsm *Up to 230 gsm for single fold
Fold Types	Single, Letter, Zig-zag, Double-parallel, Fold-out, Gate and Crossfold
Speed	3240-14400 sheets/h
Paper feed pressure adjustment	5 leveles of paper feed pressure and separator pressure
Feed Table Capacity	500 sheets of 64 gsm paper
Paper feeding system	Friction feed by 3 rubber roller
Paper size auto detection	A3, B4, A4, B5, A5, B6
Counter	4-digit ditial counter (addition or subtraction with auto-repeat)
Error detection	Jam map and Error code
Option	Perforation unit, Scoring Unit, SF-Z2 Special paper feed Unit for smooth paper
Skew Adjustment	Yes
Storing odd/special fold types	Yes (9)
Fold position setting by paper length	Yes
Paper ejection method	Neat stacking by carriage belt
Power source, consumption	110-120 V. or 220-240 V. 50/60 Hz, 75 W
Dimensions (stowed, in use)	WxDxH: 640x520x620 WxDxH: 870x530x520
Weight	33,5kg

AUTO

MM

14K/h



Tel. +49(0)7053-92910 / Fax +49(0)7053-929120 E-Mail: superfax@superfax-europe.com Web: www.superfax.eu